


P4 series

Thermal-links Compliant with RoHS2

Concept
Model




- P4 series realizes an electrical rating, DC450V/3A although it is an alloy type thermal-link.
 - It has superior thermal sensitivity that is suitable for the overheat protection of the parts.
 - It is a non-resettable thermal-link that uses a fusible alloy for its thermal element.
 - Eco-Friendly products being in compliance with RoHS2.
- It does not contain the regulated 10 substances including lead(Pb), cadmium(Cd).

■ Ratings

Type No.	Rated functioning temperature Tf (°C)	Functioning temperature (°C)	Holding temperature Th (°C)	Operating temperature range (°C)	Maximum temperature limit Tm (°C)	Electrical rating	
						Ampere (A)	Voltage (V)
P4Z	85	82 ±3	50	-40 ~ 58	160	3	DC450
							AC500
P42	115	112 ±3	77	-40 ~ 92	160	3	DC450
							AC500
P4T	134	131 ±3	89	-40 ~ 110	160	3	DC450
							AC500
P4V	151	145 ±3	109	-40 ~ 130	180	3	DC450
							AC500

• Functioning temperature is measured with silicone oil bath of which temperature is increased at the rate of 1°C/min and a detecting current is 0.1A or less.

■ Dimensions

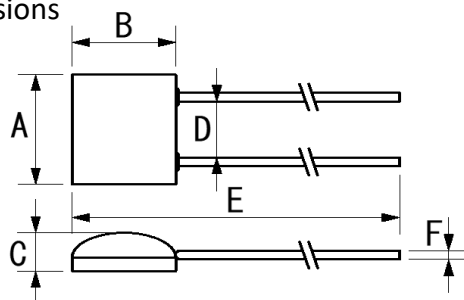

Dimensions (mm)		
A	B	C
6.6 ±0.5	5.7 ±0.5	2.3 or below
D	E	F
(5.5)	55 ±3	0.53 ±0.02

■ Safety standard information

Expected
PSE , UL , C-UL , VDE , CCC

Uchihashi Estec Co.,Ltd.

● Head Office
5-36, Imazu-Kita3-chome, Tsurumi-ku,
Osaka538-0041, Japan
TEL+81-6-6962-6666 FAX+81-6-6962-6668

<http://www.uchihashi.co.jp>

2024. 11 (rev. 2)